


EE Type 电子变压器 Power transformer

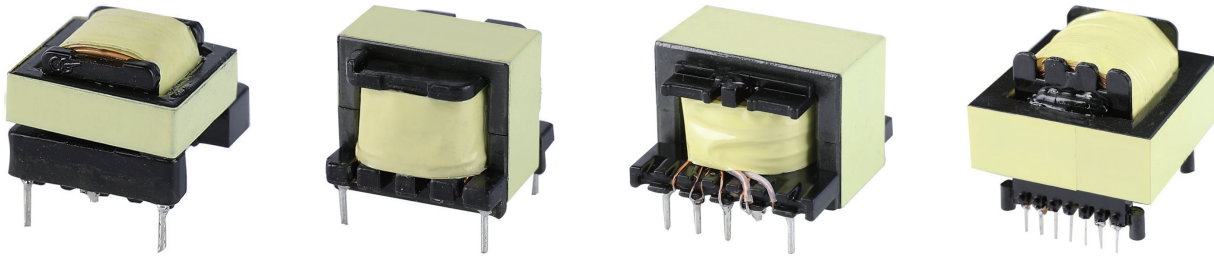

■ 特点 Features

- 工作频率: 1kHz~10MHz
- 工作温度: -20℃~+100℃
- 按客户需求设计定制
- 符合UL和VDE安规要求
- Operation Frequency from 1kHz to 10MHz
- Operating Temperature: -20℃~+100℃
- Can be designed to customer requirements
- Can meet UL and VDE safety requirements

■ 主要用途 Typical Applications

- 适用于功率电源供应器
- 适用于太阳能, 驱动电源, 电脑电视, 网络适配器等
- Designed for power solutions
- Designed for solar inverter, power adapter, PC, LED power, networking etc.

■ 典型规格 Typical Specifications

- 绝缘等级: B/F
- 推荐储存温度: -20℃~+55℃
- Insulation Grade: class B/F
- Recommended Storage Temperature: -20℃~+55℃

型号 Type	功率 Power Capacity (W)		频率 Frequency (Hz)	尺寸 Size (L*W*H) (mm)
	Forward	Flyback		
EE 5	2	1.3	1k-10M	8.0×12.5×6.0
EE 8	4	2.5		9.5×9.5×9.5
EE 10	9.5	5		11.5×11.5×12.0
EE 12.5	15	10		14.5×14.5×12.5
EE 12.6	15	10		18.0×14.5×10.5
EE 12.7	15	10		14.5×18.0×12.5
EE 13	20	12		14.5×19.0×15.5
EE 16	30	15		17.0×17.5×15.5
EE 19	40	25		20.5×17.0×18.5

型号 Type	功率 Power Capacity (W)		频率 Frequency (Hz)	尺寸 Size (L*W*H) (mm)
	Forward	Flyback		
EE 20	40	25	1k-10M	22.5×23.0×17.5
EE 21	45	27		23.0×32.0×14.0
EE 22	50	30		23.0×26.0×16.5
EE 23	50	30		24.0×26.0×18.0
EE 25	70	40		26.5×25.0×19.5
EE 28	80	45		30.0×29.0×25.5
EE29	85	50		32.5×29.5×29.0
EE 30	130	80		34.0×35.0×22.0
EE 33	200	110		35.0×35.5×30.0
EE 34	260	260		36.0×39.0×38.0
EE 35	260	260		37.0×33.0×32.0
EE 39	270	270		42.0×39.0×32.0
EE 40	310	310		42.0×30.0×38.0
EE 41	355	355		43.0×37.5×30.0
EE 42	425	425		44.0×47.5×32.5
EE 55	810	810		57.0×57.5×46.0
EE 65	1560	1560		68.0×67.0×54.0